

The image is a full-page advertisement for the Toyota SC Series Scissor Lift Range. It features a large, red Toyota SC14E scissor lift with its platform extended high up against a modern building with grey panels and windows. The lift's base is on a paved area with some greenery. A semi-transparent white box containing the title and tagline is positioned in the upper right quadrant. The background image is split horizontally: the top half shows the lift's platform and the building's upper floors, while the bottom half shows the lift's base and the building's lower floors.

SC SERIES SCISSOR LIFT RANGE

Head and shoulders above the rest

GIVE YOUR BUSINESS THE LIFT IT NEEDS.



The TMHA SC Scissor Lift is one of the most versatile tools on the market. Its adaptable design can be used for facilities maintenance, installation, construction, and more. With maximum working heights starting from 6.5m and up to 15.7m, the maneuverable and agile TMHA SC Scissor Lift is a dependable tool for many tasks.



SC06E

Max Working Height
6.5m

Load Capacity
240kg



SC08EC

Max Working Height
7.8m

Load Capacity
230kg



SC08EN

Max Working Height
8m

Load Capacity
380kg



SC10EN

Max Working Height
10m

Load Capacity
230kg



SC010E

Max Working Height
10m

Load Capacity
450kg



SC12E

Max Working Height
12m

Load Capacity
320kg



SC14E

Max Working Height
13.8m

Load Capacity
320kg



SC16E

Max Working Height
15.7m

Load Capacity
250kg

SC06E ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS

- Reduced maintenance costs**
 - Lower cost of ownership with highly versatile parts and components
 - Rapid, convenient transportation with forklift slots and lifting point
 - Double-door design for easy maintenance
- Efficient and environmentally friendly**
 - Higher work efficiency
 - Environmental protection, zero emissions
 - Folding guardrails for easy transport
- Reliable performance**
 - Small turning radius, flexible operation
 - Pothole protection system as standard




Standard configuration		
Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	DC motor drive
Automatic Braking System	Emergency Descent System	Emergency stop
Tubing Explosion-Proof System	Fault diagnosis system	Tilt protection system
All Motion Alarm	Horn	Safety brackets
Fork Lift pockets	Charging Protection System	Flashing beacon
Foldable Guard Rails	Automatic pothole protection	Overload sensor
Optional configuration		
AC power on the platform		

SC06E ELECTRIC SCISSOR LIFT



Dimensions	SC06E (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	6.5m
Maximum Platform Height (Indoor) (B)	4.5m
Maximum Working Height (Outdoor) (A)	5.5m
Maximum Platform Height (Outdoor) (B)	3.5m
Overall Length (C)	1.52m
Overall Width (D)	0.76m
Overall Height (Rails up) (E)	1.99m
Overall Height (Rails down)	1.61m
Platform Dimensions (Length/Width) (H) (F)	1.36x0.74m
Maximum horizontal extension (G)	0.6m
Minimum Ground Clearance (Stowed)	0.053m
Minimum Ground Clearance (Raised)	0.015m
Wheel Base	1.11m
Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L.	240kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	➤4.0km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	25/27sec
Maximum Gradeability	25%
Minimum Turning Radius	1.35m
Maximum Working Slope	1.5°/3°
Tire	Φ255x76mm
Power	
Batteries	24V100Ah/3HR
Integrated Charger	24V/15A
Drive Mode	Electric motor, front-wheel
Lifting Motor	24V DC/1.3kw
Drive Motor	2x24V DC/0.4kw
Weight	
Overall Weight	960kg

We reserve the right to make specification changes without notification.

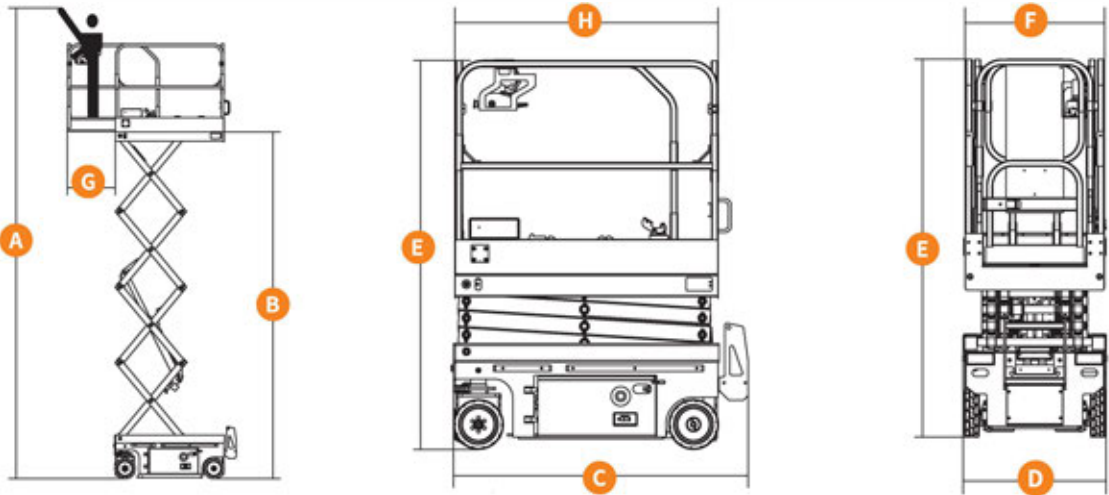

SC08EC ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC08HC
DC motor drive-SC08EC	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC08EC ELECTRIC SCISSOR LIFT






Dimensions	SC08EC (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	7.8m
Maximum Platform Height (Indoor) (B)	5.8m
Maximum Working Height (Outdoor) (A)	6.5m
Maximum Platform Height (Outdoor) (B)	4.5m
Overall Length (C)	1.85m
Overall Width (D)	0.81m
Overall Height (Rails up) (E)	1.98m
Overall Height (Rails down)	1.6m
Platform Dimensions (Length/Width) (H) (F)	1.67x0.74m
Maximum horizontal extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.056m
Minimum Ground Clearance (Raised)	0.015m
Wheel Base	1.37m

Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L.	230kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	➤4.5km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	23/32sec
Maximum Gradeability	25%
Minimum Turning Radius	1.75m
Maximum Working Slope	1.5°/3°
Tire	Φ305x100mm

Power	
Batteries	Lead-acid battery 24V225Ah/20HR
	Maintenance-free battery 24V200Ah/3HR
	Lithium battery 25.6V/125Ah
Integrated Charger	24V/30A
Drive Mode	Electric motor, front-wheel
Lifting Motor	24V DC/2.0kw
Drive Motor	2x24V DC/0.75kw

Weight	
Overall Weight	1470kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

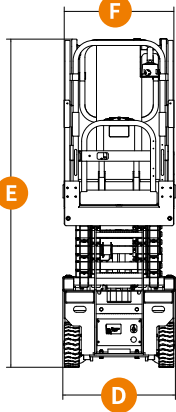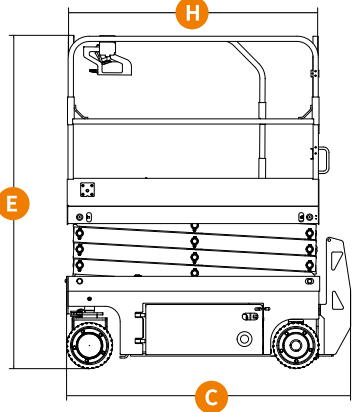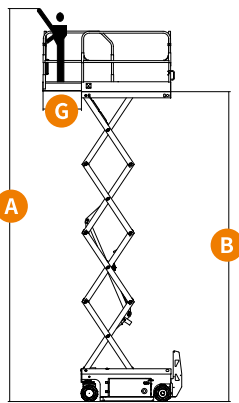

SC08EN ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC08HN
DC motor drive-SC08EN	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC08EN ELECTRIC SCISSOR LIFT




Dimensions	SC08EN (Indoors/Outdoors)
Maximum Working Height (A)	8m
Maximum Platform Height (B)	6m
Overall Length (C)	2.48m
Overall Width (D)	0.81m
Overall Height (Rails up) (E)	2.24m
Overall Height (Rails down)	1.81m
Platform Dimensions (Length/Width) (H) (F)	2.27x0.81m
Maximum horizontal extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	1.87m

Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L	380kg
S.W.L On Extension	113kg
Travel Speed (Stowed)	➤4km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	32/35sec
Maximum Gradeability	25%
Minimum Turning Radius	2.2m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm
Power	

Batteries	Lead-acid battery	24V225Ah/20HR
	Maintenance-free battery	24V200Ah/3HR
	Lithium battery	25.6V/206Ah
Integrated Charger	24V/30A	
Drive Mode	Electric motor, front-wheel	
Lifting Motor	24V DC/3.3kw	
Drive Motor	2x24V DC/0.82kw	

Weight	
Overall Weight	2150kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

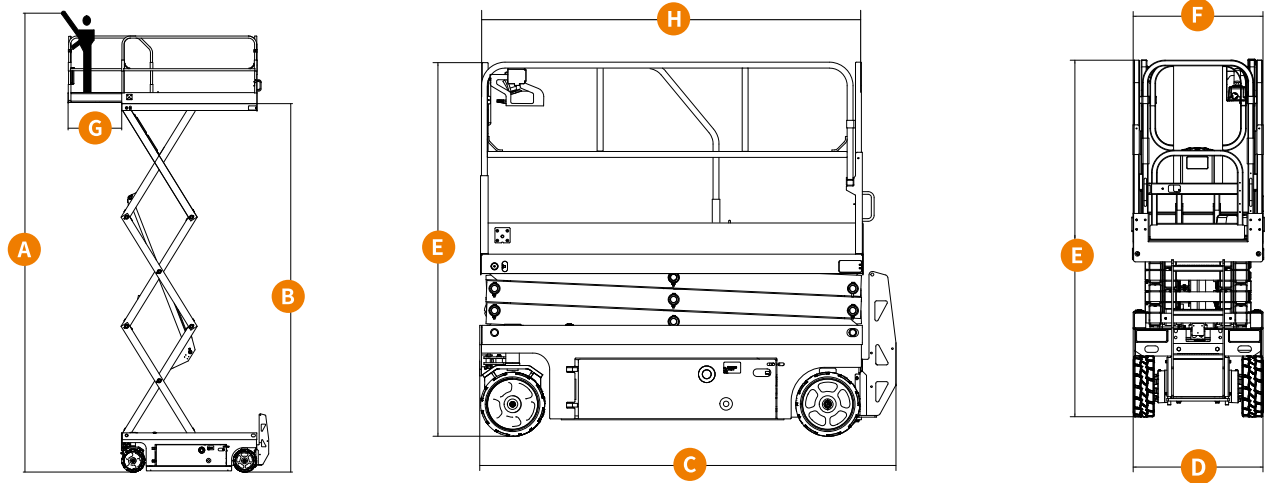

SC10EN ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC10H/SC10HN
AC motor drive	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC10EN ELECTRIC SCISSOR LIFT




Dimensions	SC10EN (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	10m
Maximum Platform Height (Indoor) (B)	8m
Maximum Working Height (Outdoor) (A)	8m
Maximum Platform Height (Outdoor) (B)	6m
Overall Length (C)	2.48m
Overall Width (D)	0.81m
Overall Height (Rails up) (E)	2.36m
Overall Height (Rails down)	1.93m
Platform Dimensions (Length/Width) (H) (F)	2.27x0.81m
Maximum horizontal extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	1.87m

Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L.	230kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	➤4.0km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	32/35sec
Maximum Gradeability	25%
Minimum Turning Radius	2.2m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm

Power		
Batteries	Lead-acid battery	24V225Ah/20HR
	Maintenance-free battery	24V200Ah/3HR
	Lithium battery	25.6V/206Ah
Integrated Charger	24V/30A	
Drive Mode	Electric motor, front-wheel	
Lifting Motor	24V DC/3.3kw	
Drive Motor	2x24V t AC0.82kw	

Weight	
Overall Weight	2390kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

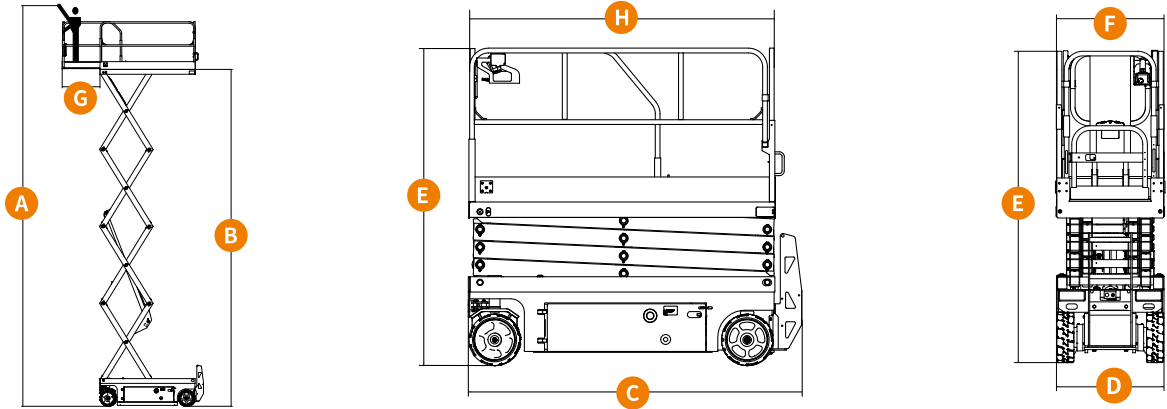

SC10E ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC10H/SC10HN
AC motor drive	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC10E ELECTRIC SCISSOR LIFT






Dimensions	SC10E (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	10m
Maximum Platform Height (Indoor) (B)	8m
Maximum Working Height (Outdoor) (A)	10m
Maximum Platform Height (Outdoor) (B)	8m
Overall Length (C)	2.48m
Overall Width (D)	1.15m
Overall Height (Rails up) (E)	2.32m
Overall Height (Rails down)	1.78m
Platform Dimensions (Length/Width) (H) (F)	2.27x1.12m
Maximum horizontal extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	1.87m

Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L.	450kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	➤4.0km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	27/36sec
Maximum Gradeability	25%
Minimum Turning Radius	2.5m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm

Power		
Batteries	Lead-acid battery	24V225Ah/20HR
	Maintenance-free battery	24V200Ah/3HR
	Lithium battery	25.6V/206Ah
Integrated Charger	24V/30A	
Drive Mode	Electric motor, front-wheel	
Lifting Motor	24V DC/4.5kw	
Drive Motor	2x24V AC/0.82kw	

Weight	
Overall Weight	2730kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

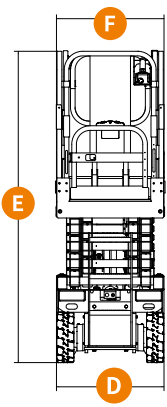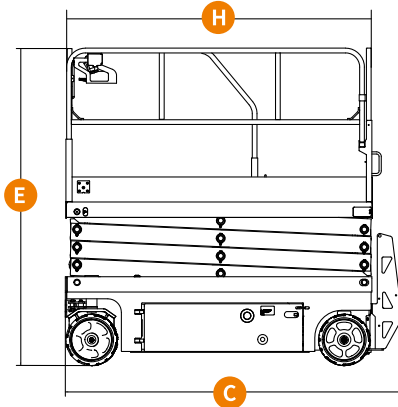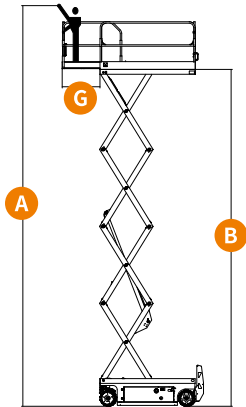

SC12E ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC12H
AC motor drive-SC12E	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC12E ELECTRIC SCISSOR LIFT




Dimensions	SC12E (Indoors/Outdoors)
Maximum Working Height (A)	12m
Maximum Platform Height (B)	10m
Overall Length (C)	2.48m
Overall Width (D)	1.15m
Overall Height (Rails up) (E)	2.24m
Overall Height (Rails down)	1.92m
Platform Dimensions (Length/Width) (H) (F)	2.27x1.12m
Maximum horizontal extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	1.87m

Performance	
Platform Allowable Occupants (Indoors/Outdoors)	2/1
S.W.L.	320kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	≥4km/h
Travel Speed (Raised)	≥0.8km/h
Up/Down Time	48/48sec
Maximum Gradeability	25%
Minimum Turning Radius	2.5m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm

Power		
Batteries	Lead-acid battery	24V225Ah/20HR
	Maintenance-free battery	24V200Ah/3HR
	Lithium battery	25.6V/206Ah
Integrated Charger		24V/30A
Drive Mode		Electric motor, front-wheel
Lifting Motor		24V DC/4.5kw
Drive Motor		2x24V AC/0.82kw

Weight	
Overall Weight	3140kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

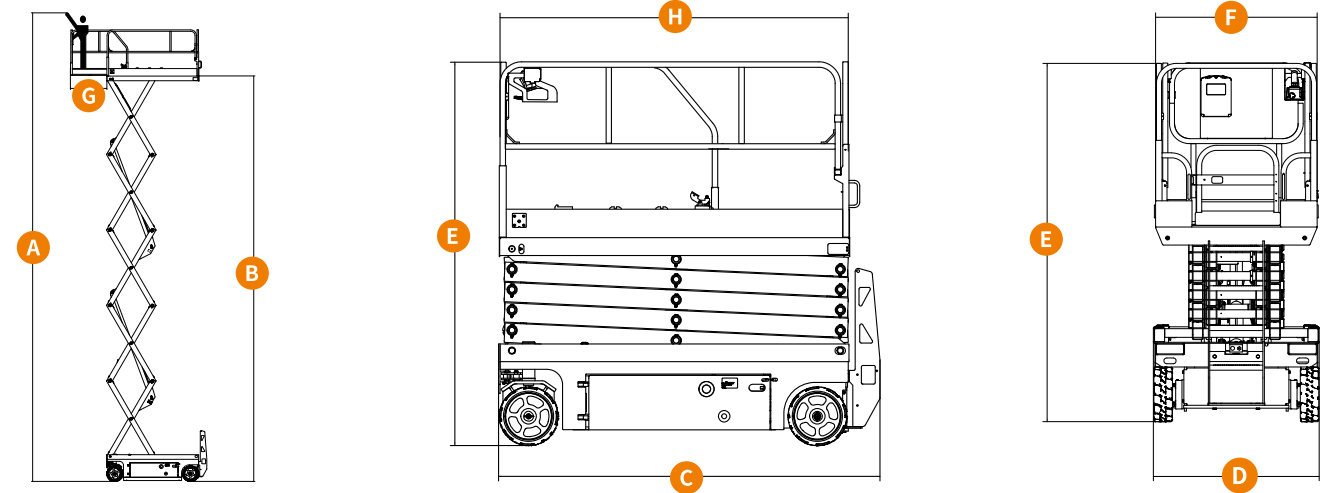

Toyota Material Handling Australia 8 Secombe Place, Moorebank NSW 2170

1800 425 438

www.toyotamaterialhandling.com.au



SC14E ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-Marking Tires	Hydraulic motor drive-SC14H
AC motor drive-SC14E	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic pothole protection
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC14E ELECTRIC SCISSOR LIFT




Dimensions	SC14E (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	13.8m
Maximum Platform Height (Indoor) (B)	11.8m
Maximum Working Height (Outdoor) (A)	10m
Maximum Platform Height (Outdoor) (B)	8m
Overall Length (C)	2.48m
Overall Width (D)	1.15m
Overall Height (Rails up) (E)	2.58m
Overall Height (Rails down)	2.04m
Platform Dimensions (Length/Width) (H) (F)	2.27x1.12m
Platform Extension Size (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	1.87m

Performance	
Platform Allowable Occupants (Indoors/Outdoor)	2/1
S.W.L.	320kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	➤4km/h
Travel Speed (Raised)	➤0.8km/h
Up/Down Time	50/50sec
Maximum Gradeability	25%
Minimum Turning Radius	2.5m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm

Power		
Batteries	Lead-acid battery	24V300Ah/20HR
	Maintenance-free battery	24V240Ah/3HR
	Lithium battery	25.6V/206Ah
Integrated Charger		24V/30A
Drive Mode		Electric motor, front-wheel
Lifting Motor		24V DC/4.5kw
Drive Motor		2x24V AC/0.82kw

Weight	
Overall Weight	3300kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

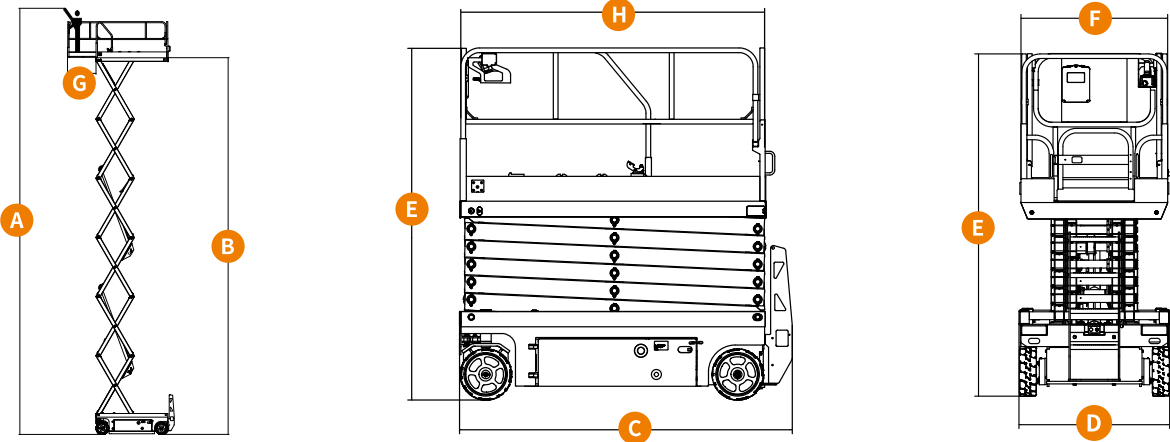

SC16E ELECTRIC SCISSOR LIFT

PRODUCT HIGHLIGHTS



Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slots and lifting point
- Swing-door design for easy maintenance



Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport



Reliable performance

- Equipped with emergency descent system to ensure the personal safety of operators
- Pothole protection system as standard



Standard configuration

Proportional controls	Self-lock gate on platform	Unidirectional platform extension
Drivable at full height	Non-marking Tires	Hydraulic motor drive-SC16H
AC motor drive-SC16E	Automatic Braking System	Emergency Descent System
Emergency stop	Tubing Explosion-Proof System	Fault diagnosis system
Tilt protection system	All Motion Alarm	Horn
Scissor Maintenance Prop	Fork Lift Pockets	Charging Protection System
Flashing beacon	Foldable Guard Rails	Automatic brakes system
Overload sensor		

Optional configuration

AC power on the platform		
--------------------------	--	--

SC16E ELECTRIC SCISSOR LIFT




Dimensions	SC16E (Indoors/Outdoors)
Maximum Working Height (Indoor) (A)	15.7m
Maximum Platform Height (Indoor) (B)	13.7m
Maximum Working Height (Outdoor) (A)	11m
Maximum Platform Height (Outdoor) (B)	9m
Overall Length (C)	2.84m
Overall Width (D)	1.25m
Overall Height (Rails up) (E)	2.58m
Overall Height (Rails down)	2.17m
Platform Dimensions (Length/Width) (H) (F)	2.64x1.02m
Maximum Horizontal Extension (G)	0.9m
Minimum Ground Clearance (Stowed)	0.1m
Minimum Ground Clearance (Raised)	0.019m
Wheel Base	2.22m

Performance	
Platform Allowable Occupants (Indoors/outdoor)	2/1
S.W.L.	250kg
S.W.L. On Extension	113kg
Travel Speed (Stowed)	≥4km/h
Travel Speed (Raised)	≥0.8km/h
Up/Down Time	60/60sec
Maximum Gradeability	25%
Minimum Turning Radius	2.5m
Maximum Working Slope	1.5°/3°
Tire	Φ381x127mm

Power		
Batteries	Lead-acid battery	24V300Ah/20HR
	Maintenance-free battery	24V240Ah/3HR
	Lithium battery	25.6V/228Ah
Integrated Charger		24V/30A
Drive Mode		Electric motor, front-wheel
Lifting Motor		24V DC/4.5kw
Drive Motor		2x24V AC/0.82kw

Weight	
Overall Weight	3440kg

We reserve the right to make specification changes without notification. All information is subject to change to reflect ongoing improvements. 202508.

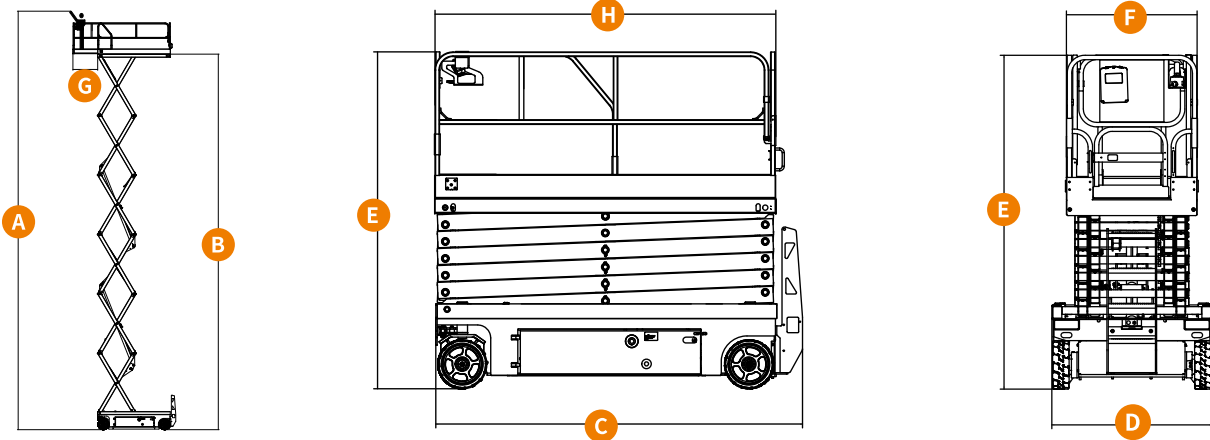

Toyota Material Handling Australia 8 Secombe Place, Moorebank NSW 2170

1800 425 438

www.toyotamaterialhandling.com.au



TAKE **ADVANTAGE** OF US WHEREVER YOU ARE

Our commitment to customer satisfaction extends nationwide, thanks to one of the finest branch networks in Australia.

With major Toyota Material Handling outlets for TMHA Scissor Lifts, along with forklift sales and rentals located throughout every state of Australia, we've got all your material handling requirements covered.



Other benefits of dealing with Toyota Material Handling include:

- World's Number One Forklift Brand* - Toyota
- Australia's biggest range of materials handling equipment
- Leading product, safety and environmental initiatives
- 100% Toyota owned branches
- Australia's largest rental fleet with over 35,000 units
- Forklift rentals from 1 day to 5 years with flexible finance options available
- 500+ service support staff & 300+ service vans



1800 425 438
toyotamaterialhandling.com.au



**TOYOTA FORKLIFT
ADVANTAGE**

SOLUTIONS FOR EVERY PALLET®

Toyota Material Handling Australia 8 Secombe Place, Moorebank NSW 2170

*dhf Intralogistik Magazine 2024

Toyota Material Handling Australia (TMHA) has used its best endeavours to ensure brochure information is correct when published. All images are used for illustration purposes only and actual colour of products may differ from images displayed. TMHA, to the extent permissible at law, is not liable to any person for loss or damage arising from reliance upon information contained in this brochure. Distributed nationally by Toyota Material Handling Australia Pty Limited ABN 38 104 644 635. 8 Secombe Place Moorebank NSW 2170. Printed November 2025.